



Electrical & Automation



THE SIMPLER SOLUTION

Automatic Power Factor Controllers
for contactor and Thyristor based APFC Panels

ABOUT US

Lauritz Knudsen Electrical & Automation, formerly known as L&T Switchgear, is a leading player in the electrical industry owing to its 70+ years of strong legacy and commitment to the nation's growth. The brand is dedicated to providing a wide range of electrical and automation products and solutions to vital sectors of the economy, including industries, utilities, infrastructure, buildings, and agriculture. Our extensive portfolio includes low-voltage and medium-voltage switchgear, automation solutions, tailored software, and services.

With manufacturing operations in Ahmednagar, Vadodara, and Coimbatore, we adhere to global standards of excellence. Our operations are supported by well-equipped, in-house design and development centers, as well as tooling facilities, ensuring precision in manufacturing.

We proudly operate six Switchgear Training Centers (STCs) across Pune, Lucknow, Coonoor, Vadodara, Delhi, and Kolkata. These centers offer tailor-made classroom courses and lab learning experiences for technicians, customers, engineers, professionals, and students.

With a deep national presence and one of the largest electrical distribution networks, comprising over 1500 partners across the country, we are committed to driving excellence and delivering superior products and solutions that power India's growth journey.

Power factor correction – now easier than ever.

Brought to you by Lauritz Knudsen - India's largest manufacturer of LT switchgear - the etaSMART & etaULTRA Series automatically corrects the power factor, with the help of contactor & thyristor for the connection and disconnection of capacitor banks.

Packed with a specially formulated optimisation program, the controller ensures accurate power factor control at the set point and hunt free operation.

etaULTRA Series - 3 CT Input

The L&T Advantage - etaULTRA

- › 3- Phase Current and Voltage measurement
- › Available upto 16 steps
- › Cascading - Master-slave configuration possible to increase contact output up to 64 steps
- › Dual PF setting for Mains-DG application
- › Individual harmonics measurement up to 31st order
- › PF setting - up to 3rd digit after decimal
- › Display of voltage angles and current angles for ease of troubleshooting
- › Site selectable 2 or 4 quadrant operation for industries with or without Solar plants



etaSMART Series - 1 CT Input

The L&T Advantage - etaSMART

- › Available upto 16 steps
- › Space-saving. Compact size of 96 x 96 mm for controller upto 8 steps
- › CT Secondary 1A/5A
- › Automatic detection of CT polarity saves time and effort. etaSMART detects the CT reversal and automatically corrects it
- › Option of LIFO, FIFO, and Intelligent control mode
- › Site selectable 2 or 4 quadrant operation for industries with or without Solar plants
- › Capacitor health check monitoring function ensures that capacitor is declared faulty if its power falls beyond a certain limit
- › Last relay output contact can be configured as Step or Alarm. Second-last relay output can be configured as Step or Fan control
- › Ambient temperature monitoring via internal sensor




Technical Specifications


Parameters	etaSMART (1 CT)		etaULTRA (3 CT)	
	etaSMART R (Contactor logic)	etaSMART T (Thyristor logic)	etaULTRA R (Contactor logic)	etaULTRA T (Thyristor + Contactor)
Voltage input (L - L)	415 - 440 VAC		50 - 760 VAC	
Aux. supply	-		85 - 300 VAC/ DC	
Current input	1A / 5A		1A / 5A	
Rated frequency	50 - 60 Hz		50 - 60 Hz	
No of output contact	4, 6, 8, 12, 14, 16 (For Contactor)	6, 8, 12, 15 (For Thyristor)	6, 8, 12, 15 (For Thyristor)	8T + 2R, 14T + 2R, 8T + 8R (T for Thyristor switching, R for Contactor switching)
Output contact rating	Relay, 250 VAC @ 5A	Thyristor, 8 - 48 VDC @ 100 mA	Relay, 250 VAC @ 5A	Relay, 250 VAC @ 5A Thyristor, 8 - 48 VDC @ 100 mA
Communication interface	-		Modbus RTU (RS 485)	
Cascading	-		Upto 64 steps in master slave configuration	
Display parameter	PF, V, I, Required KVA _r , KVA, KW, KVA _r , V-THD, I-THD, Hz, Temperature.		System PF, V, I, Required KVA _r , Voltage angles, Current angles, KVA, KW, KVA _r , V-THD, I-THD, Hz, Individual harmonics upto 31st order, Temperature	
Control power factor range	0.3 Lag to 0.3 Lead		0.3 Lag to 0.3 Lead	
Dual PF setting	-		Target PF 1 - Default Target PF 2 -Based on Digital input	
Digital input	-		2 Digital Inputs, Programmable Range:65-285	
Alarms	Over / Under compensation, Over / Under voltage, Over / Under Current, High V - THD, High I - THD, Over / Under frequency, Over temperature.		Over / Under compensation, Over / Under voltage, Over / Under Current, High V - THD, High I - THD, Over / Under frequency, Over temperature, Modbus fail alarm, Capacitor faulty alarm.	
Power consumption	7.5 VA		5.0 VA	
Relative humidity	< 90 %		< 90 %	
Mounting	Flush		Flush	
Degree of protection	IP 20 (Front IP 54)		IP 20 (Front IP 54)	
Operating temperature	20° to +60° C		20° to +60° C	
Storage temperature	30° to +80° C		30° to +80° C	
Humidity	0 to 90%		0 to 90%	
Compliances	EN 61010-1, IEC/EN 61000 - 6 - 2, IEC/EN 61000 - 6 - 4, EN 61326.		EN 61010-1, IEC/EN 61000 - 6 - 2, IEC/EN 61000 - 6 - 4, EN 61326.	

Product Dimensions


etaSMART 4R, etaSMART 6R, etaSMART 8R and etaSMART 6T

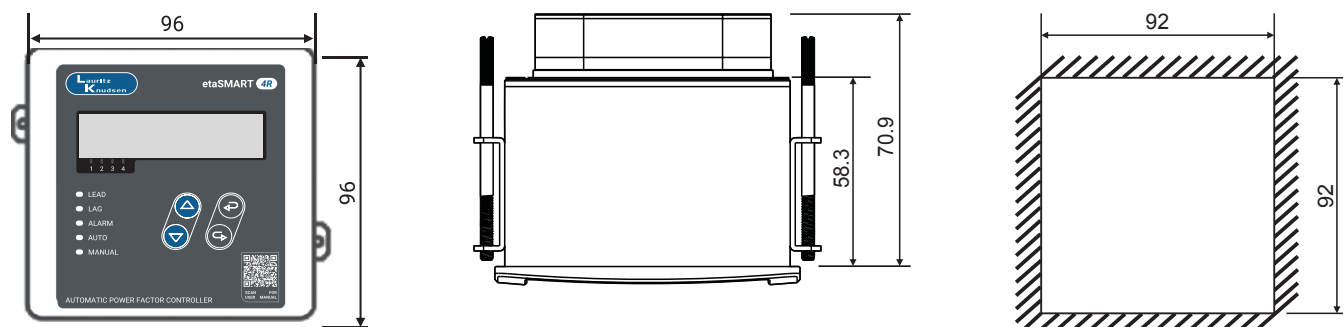

etaSMART 12R, etaSMART 14R, etaSMART 16R, etaSMART 8T, etaSMART 12T and etaSMART 15T

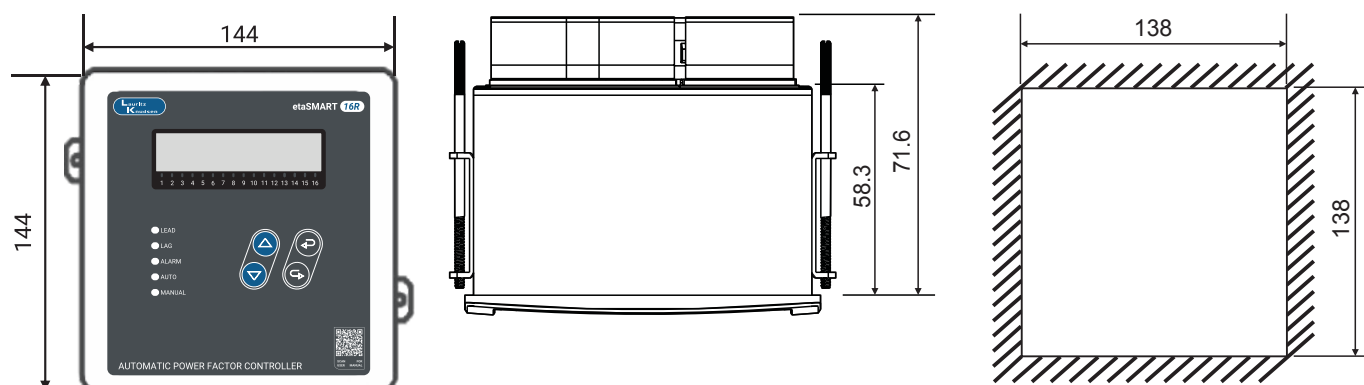


etaULTRA 8R, etaULTRA 16R, etaULTRA 8T+2R, etaULTRA 14T+2R & etaULTRA 8T+8R

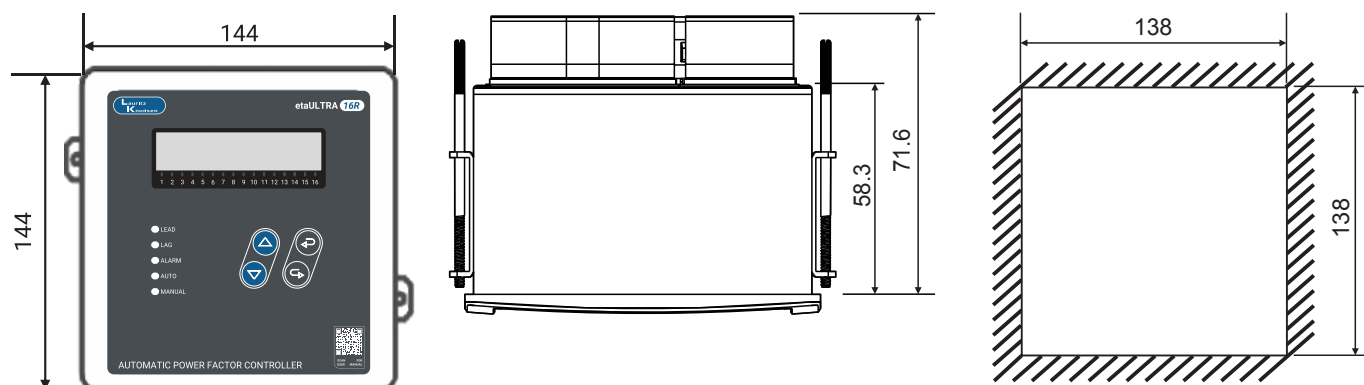


NOTE: All dimensions are in mm



4.2 Wiring Diagram


etaSMART 4R, etaSMART 6R, etaSMART 8R

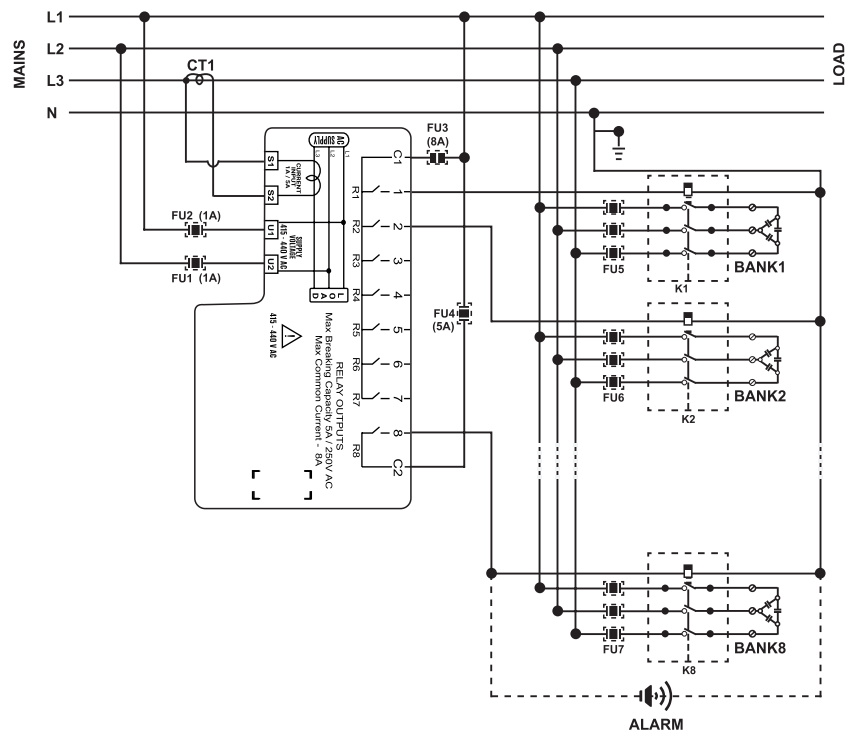

etaSMART 12R, etaSMART 14R, etaSMART 16R

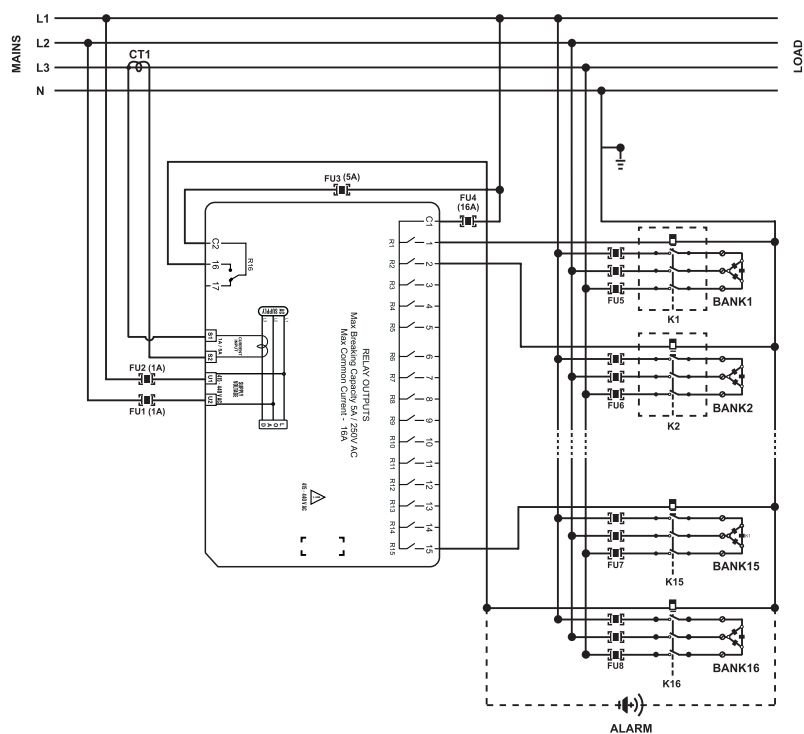

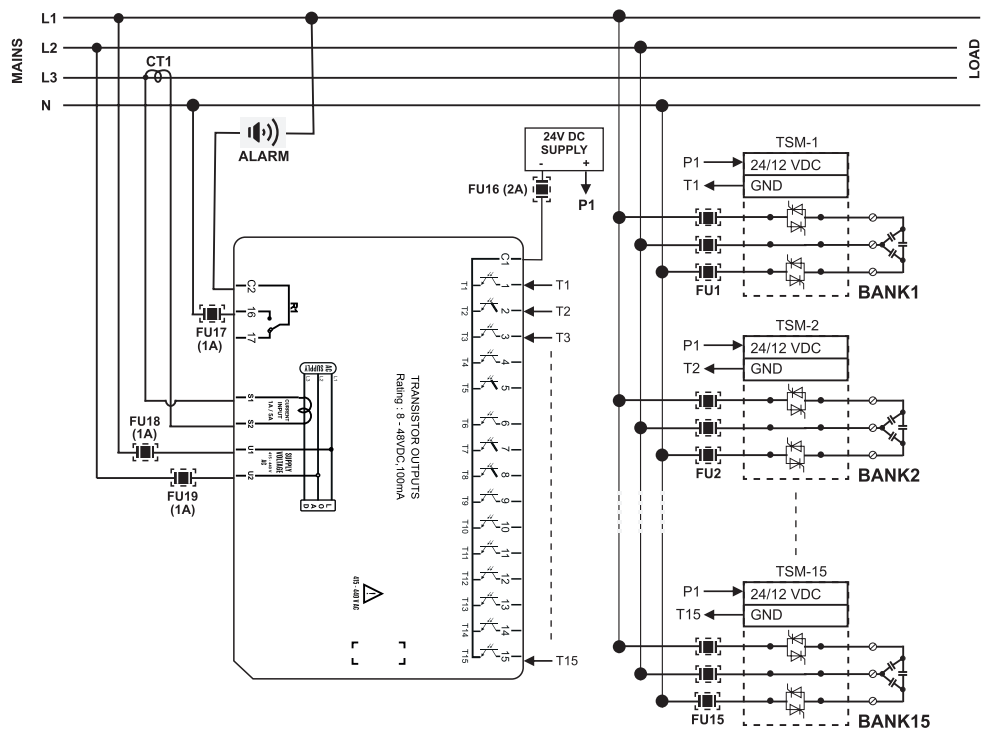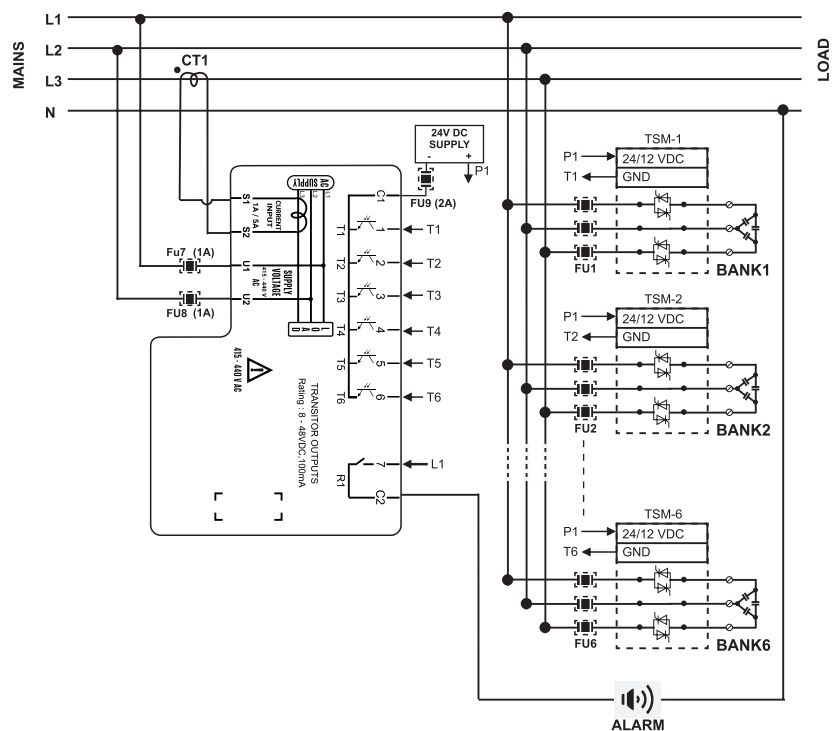


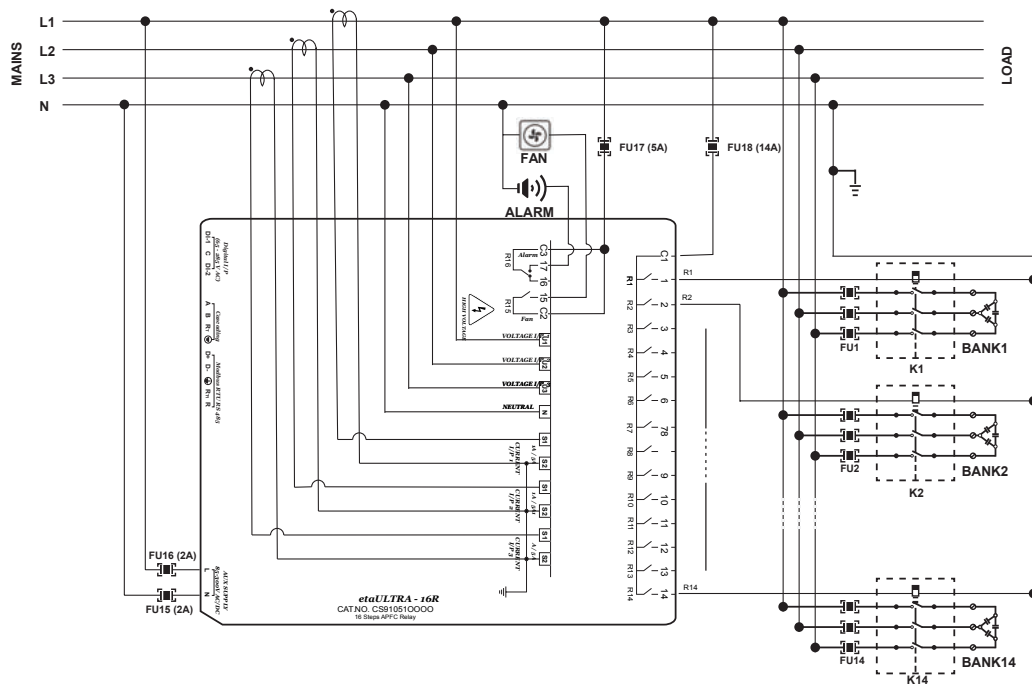

NOTE:


1. Last two relay output contacts can be configured either to switch the capacitor bank or to energise FAN and ALARM respectively as shown in wiring diagram.
2. All relay terminals, Voltage & current input terminals are suitable for wire range 12-30 AWG stranded or Solid copper wire. Modbus and cascading terminals are suitable for 14-30 AWG

etaULTRA 14T+2R

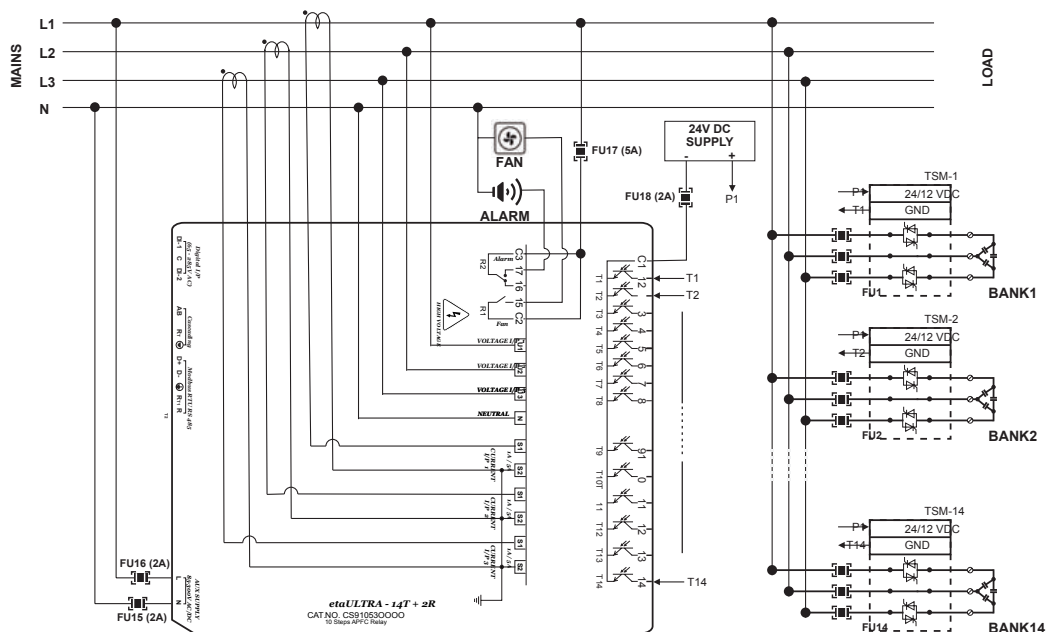

NOTE:

1. Last two relay output contacts can be configured either to switch the capacitor bank or to energise FAN and ALARM respectively as shown in wiring diagram.
2. All relay terminals, Voltage & current input terminals are suitable for wire range 12-30 AWG stranded or Solid copper wire. Modbus and cascading terminals are suitable for 14-30 AWG

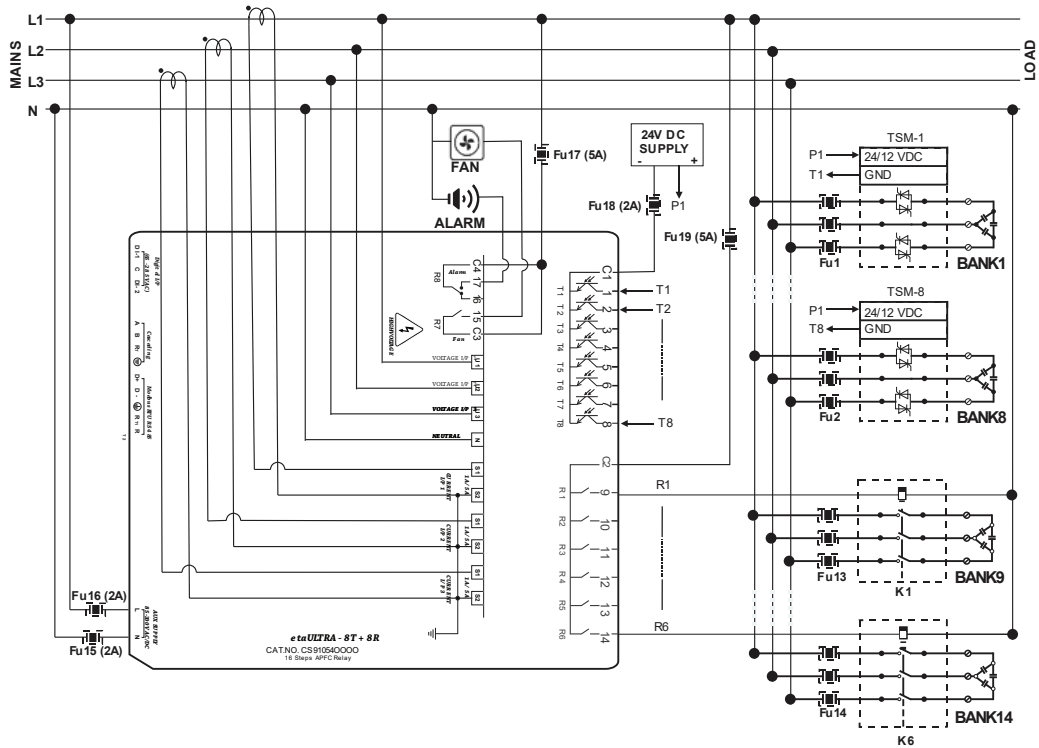

NOTE:

1. Last two relay output contacts can be configured either to switch the capacitor bank or to energise FAN and ALARM respectively as shown in wiring diagram.
2. All relay terminals, Voltage & current input terminals are suitable for wire range 12-30 AWG stranded or Solid copper wire. Modbus and cascading terminals are suitable for 14-30 AWG

Salient features of - etaULTRA



MANUAL & AUTOMATIC OPERATION

- › In auto mode, just initiate AUTO PROGRAM and the controller will configure itself or we can also configure it manually with few simple steps.



CONTROL MODE

- › Option of UFO, FIFO, and Intelligent control mode. Choose any of these control modes. By default, it is set as intelligent; this mode selects the best with combination of capacitor bank for compensation with minimum switching to achieve the desired power factor



POWER QUALITY INFORMATION

- › Instant information on the quality of your power system, etaULTRA measures current THD, and alerts you if levels go beyond set limits.



CAPACITOR HEALTH CHECK

- › Capacitor health check monitoring function ensures that capacitor is declared faulty if its power falls beyond a certain limit.



RECORD OF STEP-SWITCHING

- › You can schedule the maintenance of your installation by reading the record of the number of switching of each step.



AMBIENT TEMPERATURE MONITORING

- › Ambient Temperature Monitoring via Internal Sensor.



DISPLAY OF CURRENT & VOLTAGE ANGLES

- › Display of current & Voltage angles helps to troubleshoot the wiring-related problem.



HT Sensing

- › The wide band of input voltage measurement allows etaULTRA to sense the HT voltage with the help of voltage transformers.



CASCADING OF etaULTRA CONTROLLERS

- › The cascading feature allows the user to extend the output contacts up to 64 output contacts in a master-slave configuration.



DUAL PF (DIGITAL INPUT BASED)

- › etaULTRA comes with 2 target Power Factor set points, Target PF 1 maintains mains/ EB PF and target PF 2 maintains DG PF.



INBUILT RS485

- › etaULTRA comes with an inbuilt RS485 port which allows for seamless digital connectivity.



SITE SELECTABLE 2Q/ 4Q OPERATION

- › With the help of 4 quadrant operation etaULTRA can maintain PF in site with or without solar plant.

Salient features of - etaSAMRT



MANUAL & AUTOMATIC OPERATION

- › In auto mode, just initiate AUTO PROGRAM and the controller will configure itself or we can also configure it manually with few simple steps.



CONTROL MODE

- › Option of UFO, FIFO, and Intelligent control mode. Choose any of these control modes. By default, it is set as intelligent; this mode selects the best with combination of capacitor bank for compensation with minimum switching to achieve the desired power factor.



POWER QUALITY INFORMATION

- › Instant information on the quality of your power system, etaULTRA measures current THD, and alerts you if levels go beyond set limits.



CAPACITOR HEALTH CHECK

- › Capacitor health check monitoring function ensures that capacitor is declared faulty if its power falls beyond a certain limit.



RECORD OF STEP-SWITCHING

- › You can schedule the maintenance of your installation by reading the record of the number of switching of each step.



AMBIENT TEMPERATURE MONITORING

- › Ambient Temperature Monitoring via Internal Sensor.






SITE SELECTABLE 2Q/ 4Q OPERATION

- › With the help of 4 quadrant operation etaSMART can maintain PF in site with or without solar plant.

Application based Product selection

Application	Available variant
For balanced load/ 1CT	etaSMART series
For Unbalance load/ 3CT	etaULTRA series
For Fast fluctuating load/ Thyristor switching/ Real-time switching	etaSMART T or etaULTRA T
For Solar application/ 4 quadrant operation	etaSMART & etaULTRA
Controller for more than 16 steps	etaULTRA
HT Sensing	etaULTRA
Dual PF – DI based	etaULTRA
Communication – Inbuilt Rs485	etaULTRA

Guidelines-CT selection and placement

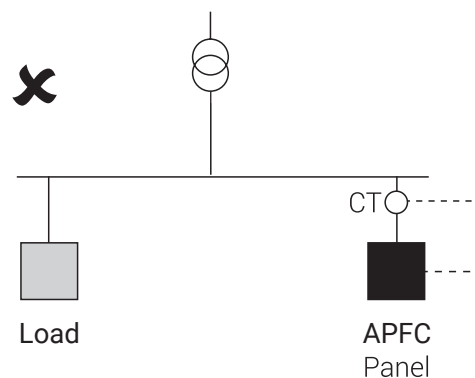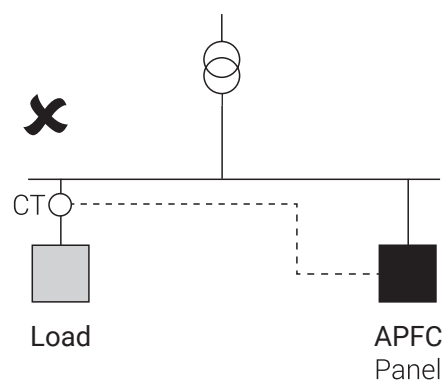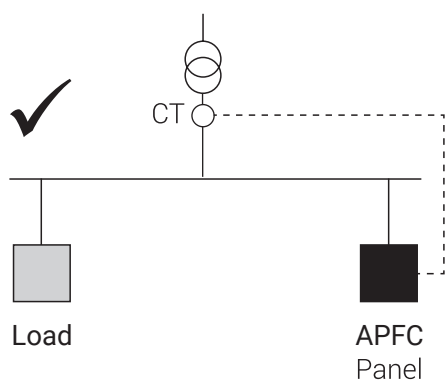


Recommendation - Use CT with 1 Amp secondary in case the distance between CT and Controller is more than 10 meter

NOTE: Capacitor duty contactor must be used for capacitor switching

Application note



IS YOUR EXISTING APFC PANEL ABLE TO MAINTAIN THE TARGET POWER FACTOR
UNDER FLUCTUATING LOAD CONDITIONS?

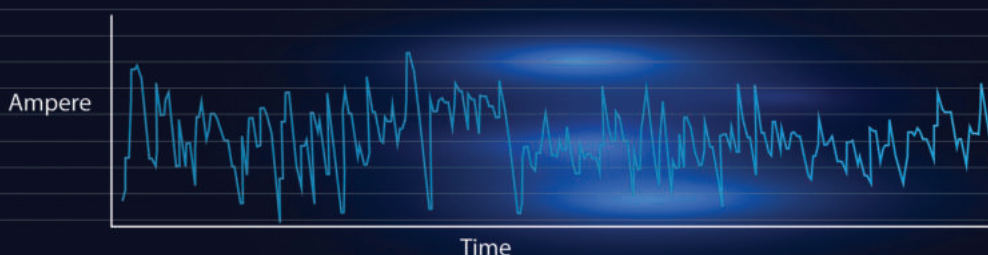

If the APFC Panel is not designed to take care of these fluctuating load conditions, result is:

Low Monthly PF
Average PF 0.82*

High Electricity Bill
PF Penalty – ₹ 78,541.00*

Lauritz Knudsen Electrical & Automation brings to you customised solutions
For Dynamic Power Factor Correction Systems.

etaSMART T
Single CT APFC Controller



etaULTRA T
Three CT APFC Controller



For Thyristor switched APFC Panels

Ensure significant improvement in monthly PF in case of fluctuating loads.

POWER FACTOR CONTROL IN UNBALANCED LOAD CONDITIONS


PROBLEM ► How to control Power Factor in case of Unbalanced Load Conditions?

SOLUTION ► APFC Controller with 3 CT inputs.
Controller with 3 CT inputs calculate average value of current.
This results into better Power Factor than that with 1 CT input.



etaULTRA

3 CT APFC controller for contactor and thyristor based APFC Panels.

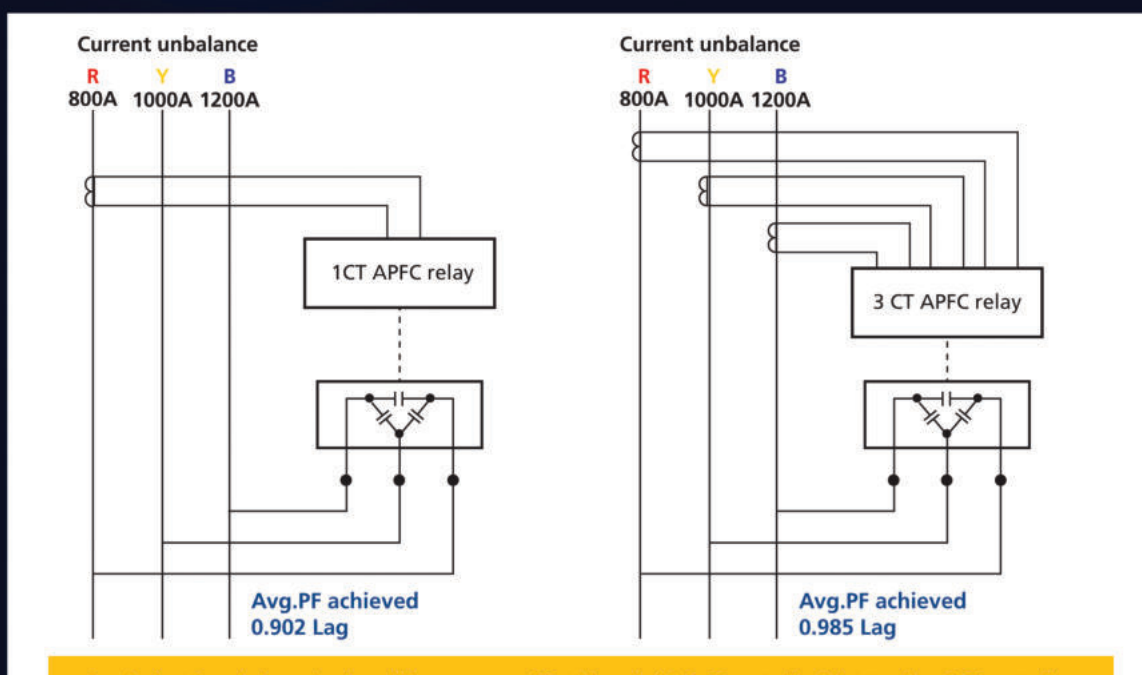

Conclusion- In unbalance load conditions, average PF achieved with 3 CT controller is better than 1 CT controller.

Note: Value of current and PF are for representation only.

CASCADING OF APFC CONTROLLERS

Requirement - APFC Panel with more than 16 steps.

PROBLEM ▶ Use of 2 separate APFC controllers lead to hunting of contactors and malfunction of APFC Panel.

SOLUTION ▶ Cascading of APFC Controllers.
Multiple APFC controllers with Cascading [Master – slave logic] can be connected together to offer higher number of steps.

Introducing } **etaULTRA**

3 CT APFC controller with inbuilt cascading facility

**etaULTRA 16R
Master**

**etaULTRA 16R
Slave**



32
Steps



etaULTRA can offer up to 64 steps with
cascading of 4 controllers.

*Numbers are just for representation.

etaSMART T & etaULTRA T

- › etaSMART - 1 CT APFC Controller for Thyristor switching
- › etaULTRA - 3 CT APFC Controller for Thyristor switching

Salient Features of etaSMARTT & etaULTRAT Controllers:-


- » Site selectable 2 & 4 Quadrant operation for industries with or without solar plants
- » Common terminal for 1/5 Amp CT input
- » PF setting - upto 3rd digit after decimal

etaULTRA T - Solution for Specific Applications :-

- » Dual PF setting for Mains / DG application
- » Cascading in master - Slave configuration to increase steps up to 64

Schematic for Thyristor based APFC Panels

- Auto + Manual control in Thyristor based APFC Panels can be achieved with this scheme

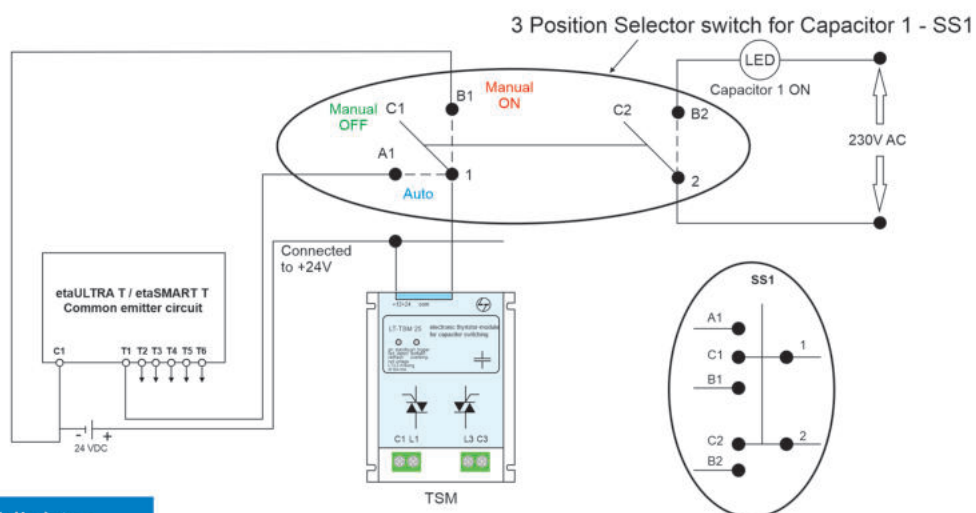

Highlights :

- › Individual 3 way selector switch is required for Auto/ Manual operation of each TSM feeder.
e.g. - In 6 steps thyristor based APFC panel, total 6 selector switches will be required.

Note :



- › Interposing relays should not be used along with etaSMART T/ etaULTRA T for switching of Thyristor switches.

Power Quality Solutions



Power Capacitors



Capacitors Duty Conductors



Thyristor Switching Modules



Reactive Power Management Solutions



APFC Controller

Active Harmonic Filter



Detuned Harmonic Filter Reactor

Switchgear Training Centres



Pune

Lauritz Knudsen Electrical & Automation
Switchgear Training Centre
T-156 / 157, MIDC,
Bhosari, Pune - 411 026
Tel: 020-2712 0037 / 2712 0653
E-mail: STC-PUNE@LK-EA.com



Lucknow

Lauritz Knudsen Electrical & Automation
Switchgear Training Centre
C-6 & 7, UPSIDC,
P. O. Sarojininagar,
Lucknow - 226 008
Tel: 97944 54455
E-mail: STC-LUCKNOW@LK-EA.com



Delhi

Lauritz Knudsen Electrical & Automation
Switchgear Training Centre
A-25, Imperia Complex, First Floor
Mohan Cooperative Industrial Estate
Near Sarita Vihar / Mohan Estate Metro Station
Main Mathura Road, New Delhi - 110044
Tel: 9899020306 / 9720186726 / 9560845094
E-mail: STC-DELHI@LK-EA.com



Kolkata

Lauritz Knudsen Electrical & Automation
Switchgear Training Centre,
2nd Floor, Block BN3, Sector V,
Salt Lake City,
Kolkata - 700091, West Bengal
Tel: 7738717893 / 7797795567
E-mail: STC-KOLKATA@LK-EA.com



Vadodara

Lauritz Knudsen Electrical & Automation
Switchgear Training Centre
Behind L&T Knowledge City,
Near Village Ankhol,
Vadodara - 390019
Tel: 0265 6147805 / 6147808
E-mail: STC-VADODARA@LK-EA.com



Coonor

Lauritz Knudsen Electrical & Automation
Switchgear Training Centre
Ooty-Coonoor Main Road
Yellanahalli P.O.,
The Nilgiris - 643 243
Tel: 0423 251 7107
E-mail: STC-COONOOR@LK-EA.com

Customer Interaction Center (CIC)
Phone no: 022 6932 7800
Web: www.LK-EA.com | e-mail: CIC@LK-EA.com



Electrical Standard Products (ESP) Offices

HEAD OFFICE

Lauritz Knudsen Electrical & Automation, A/600, Shil-Mahape Road, TTC Industrial Area, MIDC Thane, Navi Mumbai, 400 710, Maharashtra.
Tel: 022-6722 6300 | Fax: 022-6705 1112 | e-mail: CIC@LK-EA.com

BRANCH OFFICES

Lauritz Knudsen Electrical & Automation
C-201, The First Commercial Complex,
B/S Keshavbaug Party Plot, Vastrapur,
Ahmedabad - 380 015
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Shri Daneshwari, 1st Floor,
Plot No. 17, 2nd Cross, Near Old Income
Tax Office Road, Vidyanagar,
Hubballi - 580 021
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
No.10, Fortuna Towers, 2nd Floor,
Rana Pratap Marg, Near NBRI,
Lucknow - 226 001
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
A06/A07, Second Floor,
Grand Chandra Complex, Frazer Road
Patna - 800 001
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Wework Central, #36 Infantry Road,
Bengaluru - 560 001
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
AWFIS Space Solutions, Prestige Phoenix,
4th floor, 1405, Umanagar, Begumpet,
Hyderabad - 500 016
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
El Dorado Building, 3rd Floor, 6,
Venkatraman Street, Chinna Chokkikulam,
Madurai - 625 002
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
UrbanWrk, 5th Floor, Sai Radhe,
Raja Bahadur Mill Road, Behind Hotel
Grand Sheraton, Sangamwadi
Pune - 411 001
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Workloop Unit-612, 6th Floor,
Esplanade One, Rasulgarh,
Bhubaneswar, Odisha-751010
Phone No: 022 6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Workie, 214 - 2nd Floor,
Apollo Premier, PU-4,
Scheme No. 54, Vijay Nagar Square,
Indore - 452 010
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Bestech Business Park,
Tower - A, 2nd floor, Sector - 66
Mohali - 160059
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Office No. 211 & 212, Pithalia Plaza,
KK Road, Near Fafadih Chowk,
Raipur - 492 001
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation,
The Executive Centre
Level 8, Olympia Teknos Park
28, SIDCO Industrial Estate, Guindy,
Chennai - 600 032, Tamil Nadu,
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Office No. 430, 4th Floor,
Jaipur Electronic Market, Riddhi Siddhi,
Gopalpura Bypass,
Jaipur - 302 018
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
TC II, Tower B, PRIMA BAY Gate No. 5,
Saki Vihar Road Powai,
Mumbai - 400 072
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation,
DevX 4th Floor, A Wing, Om 9 Square,
150 Ft Ring Road, Near Nana Maya Circle,
Opp Silver Heights,
Rajkot - 360 001
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Playworkz Coworking Space
43 & 44, 3rd Cross,
Bharathy Colony, Peelamedu,
Coimbatore - 641 004
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
GDR Siddha, Ground Floor, N Road
Bistupur, Opposite St. Mary's Church,
Jamshedpur - 831 001
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Unnati Building, 2nd Floor,
Automation Campus, A-600, TTC Industrial
Area Shil-Mahape Road, Mahape,
Navi Mumbai - 400 710
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
10th Floor, Titaanium Business,
Bhimrad Road, Althan
Surat - 395 017
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
3rd Floor, 1&2 Vijay Park,
Main Chakrata Road, Opp. Anandam,
Near Ballupur chowk,
Dehradun - 248 001
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Business Communication Centre
2nd Floor, Chiramel Chambers,
Kurisupally Road, Ravipuram,
Kochi - 682 015
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
M1 & M2, Mezzanine Floor,
Himalaya Excellency,
Plot No. C-47, Pratap Nagar Square,
Nagpur - 440 022
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
11th Floor, Block-D, Notus IT Park,
Sarabhai Campus, Bhailal Amin Marg,
Vadodara - 390 023
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Ground Floor, B-27,
Biplab Rashbihari Sarani,
Sector 2A, Bidhan Nagar,
Durgapur - 713 212
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz & Knudsen Electrical & Automation,
207, 2nd floor, Revolution Complex,
Station Road, E Ward,
Next to Pedestrian Bridge,
Kolhapur - 416 001
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation,
3rd floor, Uttam Tower by Viraj Estate,
Sharanpur Road,
Nasik - 422 002
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Naga Chambers, 3rd Floor, D/No. 12-1-16,
Plot No. 49, Survey No. 1051, Waltair Main Road,
Visakhapatnam - 530 002
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
6th Floor, Exotica Greens, A Block, 191,
R G Baruah Road, Guwahati Central,
Guwahati - 781 005
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
2nd Floor, BN3, Salt Lake, Sector-V,
Kolkata - 700 091
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
A-25, 1st Floor, Imperia Complex,
Mohan Corporate Industrial Estate,
Near Sarita Vihar Metro Station,
Mathura Road,
New Delhi - 110 044
Phone no: 022-6932 7800
e-mail: CIC@LK-EA.com

Product improvement is a continuous process. For the latest information and special application, please contact any of our offices listed here. Product photographs shown for representative purpose only.



Lauritz Knudsen Electrical & Automation, Electrical Standard Product

A/600, Shil-Mahape Road, TTC Industrial Area, MIDC Thane, Navi Mumbai, 400 710, Maharashtra, Phone No: 022-6722 6300 | Web: www.LK-EA.com

Customer Interaction Center (CIC)

Phone no: 022-6932 7800

Web: www.LK-EA.com | e-mail: CIC@LK-EA.com